


ARCHITECTURAL CABINET

CW750 SERIES

PERFECT FOR LARGE SPACES

The CW750 architectural cabinet convector is the first in our collection of high watt-density heaters. With its contemporary style, this heater is a great option for locations requiring large heat capacities where a forced-air unit just won't do. Showrooms, museums and classrooms, are all examples of large areas generally requiring units offering larger heating capacities, and also areas intolerant to noise.

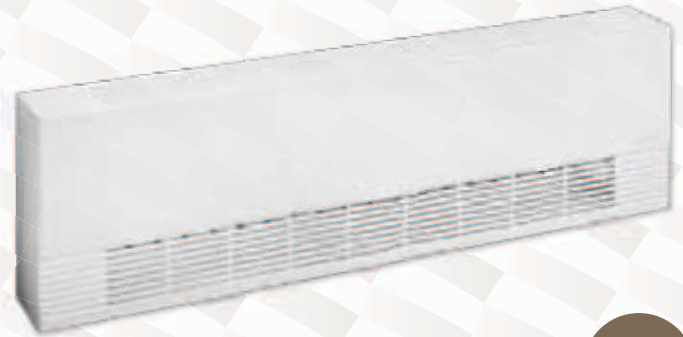

3 YEAR
WARRANTY

INCREDIBLE HEAT DENSITY

UP TO 750 W PER LINEAR FOOT

AESTHETIC EXTRUDED ALUMINUM GRILLE

PERFECT FOR PUBLIC PLACES

BUSINESSES, PUBLIC INSTITUTIONS, ETC.

BLANK SECTIONS AVAILABLE

FOR A CONTINUOUS EFFECT

IDEAL FOR:

SHOPPING MALL, HOSPITAL, LOBBY, CORRIDOR

COLOURS

- standard: white, silica white
- optional: almond, black, textured charcoal, silver, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat

MANUFACTURING

- 18-gauge steel cabinet, 16-gauge steel front panel and extruded aluminum grilles with a thickness equivalent to 13 gauge
- front air intake and top air discharge (front inlet and front outlet available*)
- thermal protection with automatic reset
- full-length wireway

ELEMENTS

three tubular elements, stainless steel sheathed with boxed aluminum fins for improved heat dissipation; the elements are securely fastened at their centers, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION

- surface mounted or wall recessed* with 4-piece trim frame (optional)
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- blank sections (custom lengths) and accessories are available for a continuous effect (optional)

* Front inlet and front outlet [FF] version is available only in 450 W and 600 W densities per linear foot (see the technical specifications table)

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
CW750T12*	built-in tamper-proof single pole thermostat	97.50
CW750T22*	built-in tamper-proof double pole thermostat	164.00
CW750T33*	built-in tamper-proof triple pole thermostat	206.00
CW750RE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]	51.50
CW750RE156*	built-in electronic low voltage relay [6 A @ 600 V]	91.25
CW750RE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	70.00
CW750R841C1169*	built-in mechanical low voltage relay c/w transformer 24 V [5000 W @ 208 V / 6000 W @ 240 V]	112.00
CW750R841C1144*	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 347 V]	112.00
CW750R841C1151*	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]	112.00
CW750R841D1036*	built-in mechanical low voltage relay w/o transformer 24 V [6000 W @ 120 V-600 V]	98.75
PK3*	pedestal kit (kit of two)	105.00
CW750JS*	joiner strip (2 in. – 51 mm)	105.00
CW750IC90*	inside corner (back measures 9 13/16 in. (249 mm) long on each side)	487.00
CW750OC90*	outside corner (back measures 9 13/16 in. (249 mm) long on each side)	487.00
CW750TB*	4-piece trim frame	105.00
CW750CB**	clean back (fully finished, no mounting holes or knockouts)	126.00

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Add W for white or SW for silica white

* Factory installed

* Factory installation is strongly recommended



This unit is intended for commercial use. It can become very hot; domestic use is not recommended.

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 750 W PER LINEAR FOOT		MEDIUM DENSITY 600 W PER LINEAR FOOT		LOW DENSITY 450 W PER LINEAR FOOT		VOLTAGE	LENGTH	WEIGHT	PRICE		
CODE	WATTS	CODE	WATTS	CODE	WATTS	VOLTS	MM	IN.	KG	LB	
---	1500	CW7506128*	1200	CW7506098*	900	208	600	23 5/8	12.7	28	510.00
---	1500	CW7506122	1200	CW7506092	900	240	600	23 5/8	12.7	28	510.00
---	1500	CW7506127	1200	CW7506097	900	277	600	23 5/8	12.7	28	510.00
---	1500	CW7506123	1200	CW7506093	900	347	600	23 5/8	12.7	28	510.00
---	1500	CW7506125	1200	CW7506095	900	480	600	23 5/8	12.7	28	510.00
---	1500	CW7506126	1200	CW7506096	900	600	600	23 5/8	12.7	28	510.00
---	2250	CW7509188*	1800	CW7509138*	1350	208	900	35 7/16	17.7	39	572.00
---	2250	CW7509182	1800	CW7509132	1350	240	900	35 7/16	17.7	39	572.00
---	2250	CW7509187	1800	CW7509137	1350	277	900	35 7/16	17.7	39	572.00
---	2250	CW7509183	1800	CW7509133	1350	347	900	35 7/16	17.7	39	572.00
---	2250	CW7509185	1800	CW7509135	1350	480	900	35 7/16	17.7	39	572.00
---	2250	CW7509186	1800	CW7509136	1350	600	900	35 7/16	17.7	39	572.00
---	3000	CW75012248*	2400	CW75012188*	1800	208	1200	47 1/4	24	53	634.00
---	3000	CW75012242	2400	CW75012182	1800	240	1200	47 1/4	24	53	634.00
---	3000	CW75012247	2400	CW75012187	1800	277	1200	47 1/4	24	53	634.00
---	3000	CW75012243	2400	CW75012183	1800	347	1200	47 1/4	24	53	634.00
---	3000	CW75012245*	2400	CW75012185	1800	480	1200	47 1/4	24	53	634.00
---	3000	CW75012246*	2400	CW75012186	1800	600	1200	47 1/4	24	53	634.00
CW75015378*	3750	CW75015308*	3000	CW75015228*	2250	208	1500	59 1/16	29	64	696.00
CW75015372	3750	CW75015302	3000	CW75015222	2250	240	1500	59 1/16	29	64	696.00
CW75015377	3750	CW75015307	3000	CW75015227	2250	277	1500	59 1/16	29	64	696.00
CW75015373	3750	CW75015303	3000	CW75015223	2250	347	1500	59 1/16	29	64	696.00
CW75015375*	3750	CW75015305*	3000	CW75015225*	2250	480	1500	59 1/16	29	64	696.00
CW75015376*	3750	CW75015306*	3000	CW75015226*	2250	600	1500	59 1/16	29	64	696.00
CW75018458*	4500	CW75018368*	3600	CW75018278*	2700	208	1800	70 7/8	33.6	74	758.00
CW75018452	4500	CW75018362	3600	CW75018272	2700	240	1800	70 7/8	33.6	74	758.00
CW75018457	4500	CW75018367	3600	CW75018277	2700	277	1800	70 7/8	33.6	74	758.00
CW75018453	4500	CW75018363	3600	CW75018273	2700	347	1800	70 7/8	33.6	74	758.00
CW75018455*	4500	CW75018365*	3600	CW75018275*	2700	480	1800	70 7/8	33.6	74	758.00
CW75018456*	4500	CW75018366*	3600	CW75018276*	2700	600	1800	70 7/8	33.6	74	758.00
CW75021528*	5250	CW75021428*	4200	CW75021318*	3150	208	2100	82 11/16	38.6	85	819.00
CW75021522	5250	CW75021422	4200	CW75021312	3150	240	2100	82 11/16	38.6	85	819.00
CW75021527	5250	CW75021427	4200	CW75021317	3150	277	2100	82 11/16	38.6	85	819.00
CW75021523	5250	CW75021423	4200	CW75021313	3150	347	2100	82 11/16	38.6	85	819.00
CW75021525*	5250	CW75021425*	4200	CW75021315*	3150	480	2100	82 11/16	38.6	85	819.00
CW75021526*	5250	CW75021426*	4200	CW75021316*	3150	600	2100	82 11/16	38.6	85	819.00
CW75024608*	6000	CW75024488*	4800	CW75024368*	3600	208	2400	94 1/2	43.5	96	881.00
CW75024602	6000	CW75024482	4800	CW75024362	3600	240	2400	94 1/2	43.5	96	881.00
CW75024607	6000	CW75024487	4800	CW75024367	3600	277	2400	94 1/2	43.5	96	881.00
CW75024603	6000	CW75024483	4800	CW75024363	3600	347	2400	94 1/2	43.5	96	881.00
CW75024605*	6000	CW75024485*	4800	CW75024365*	3600	480	2400	94 1/2	43.5	96	881.00
CW75024606*	6000	CW75024486*	4800	CW75024366*	3600	600	2400	94 1/2	43.5	96	881.00

Add W for white or SW for silica white (or consult the optional colour chart and contact your *STELPRO representative for all other colours)

Add FF for front air outlet (available only in 450 W and 600 W densities per linear foot)

* Three-phase model available upon request

--- not available

TECHNICAL DRAWINGS

