


ARCHITECTURAL CABINET

CW1000 SERIES

THE POWERHOUSE OF CABINET CONVECTORS

The CW1000 is a great option for heating large areas requiring higher than normal heat-loss recovery. With its high-density output of 1000 W per linear foot, engineers, architects and designers will no doubt appreciate this heater. It can heat large spaces that have little room to install heaters.

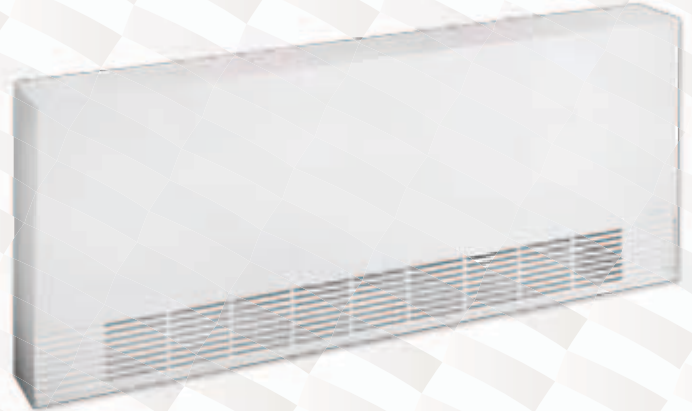

3 YEAR
WARRANTY

INCREDIBLE HEAT DENSITY

UP TO 1000 W PER LINEAR FOOT

AESTHETIC EXTRUDED ALUMINUM GRILLE

PERFECT FOR PUBLIC PLACES

LARGE LOBBIES, SHOPPING MALLS, ETC.

BLANK SECTIONS AVAILABLE

FOR A CONTINUOUS EFFECT



This unit is intended for commercial use. It can become very hot; domestic use is not recommended.

IDEAL FOR:

SHOPPING MALL, HOSPITAL, LOBBY, CORRIDOR

COLOURS

- standard: white, silica white
- optional: almond, black, textured charcoal, silver, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat

MANUFACTURING

- 18-gauge steel cabinet, 16-gauge steel front panel and extruded aluminum grilles with a thickness equivalent to 13 gauge
- front air intake and top air discharge (front inlet and front outlet available*)
- thermal protection with automatic reset
- full-length wireway

ELEMENTS

four tubular elements, stainless steel sheathed with boxed aluminum fins for improved heat dissipation; the elements are securely fastened at their centers, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left or right junction box (optional)
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION

- surface mounted or wall recessed* with 4-piece trim frame (optional)
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- blank sections (custom lengths) and accessories are available for a continuous effect (optional)

* Front outlet [FF] for recessed installations available only in 600 W and 800 W densities per linear foot (see the technical specifications table)

TECHNICAL SPECIFICATIONS

STANDARD DENSITY 1000 W PER LINEAR FOOT		MEDIUM DENSITY 800 W PER LINEAR FOOT		LOW DENSITY 600 W PER LINEAR FOOT		VOLTAGE	LENGTH	WEIGHT	PRICE		
CODE	WATTS	CODE	WATTS	CODE	WATTS	VOLTS	MM	IN.	KG	LB	
---	2000	---	1600	CW10006128	1200	208	600	23 5/8	15.8	35	624.00
---	2000	---	1600	CW10006122	1200	240	600	23 5/8	15.8	35	624.00
---	2000	---	1600	CW10006127	1200	277	600	23 5/8	15.8	35	624.00
---	2000	---	1600	CW10006123	1200	347	600	23 5/8	15.8	35	624.00
---	2000	---	1600	CW10006125	1200	480	600	23 5/8	15.8	35	624.00
---	2000	---	1600	CW10006126	1200	600	600	23 5/8	15.8	35	624.00
CW10009308	3000	CW10009248	2400	CW10009188	1800	208	900	35 7/16	24	53	706.00
CW10009302	3000	CW10009242	2400	CW10009182	1800	240	900	35 7/16	24	53	706.00
CW10009307	3000	CW10009247	2400	CW10009187	1800	277	900	35 7/16	24	53	706.00
CW10009303	3000	CW10009243	2400	CW10009183	1800	347	900	35 7/16	24	53	706.00
CW10009305	3000	CW10009245	2400	CW10009185	1800	480	900	35 7/16	24	53	706.00
CW10009306	3000	CW10009246	2400	CW10009186	1800	600	900	35 7/16	24	53	706.00
CW100012408	4000	CW100012328	3200	CW100012248	2400	208	1200	47 1/4	31.3	69	788.00
CW100012402	4000	CW100012322	3200	CW100012242	2400	240	1200	47 1/4	31.3	69	788.00
CW100012407	4000	CW100012327	3200	CW100012247	2400	277	1200	47 1/4	31.3	69	788.00
CW100012403	4000	CW100012323	3200	CW100012243	2400	347	1200	47 1/4	31.3	69	788.00
CW100012405	4000	CW100012325	3200	CW100012245	2400	480	1200	47 1/4	31.3	69	788.00
CW100012406	4000	CW100012326	3200	CW100012246	2400	600	1200	47 1/4	31.3	69	788.00
CW100015508	5000	CW100015408	4000	CW100015308	3000	208	1500	59 1/16	38.1	84	871.00
CW100015502	5000	CW100015402	4000	CW100015302	3000	240	1500	59 1/16	38.1	84	871.00
CW100015507	5000	CW100015407	4000	CW100015307	3000	277	1500	59 1/16	38.1	84	871.00
CW100015503	5000	CW100015403	4000	CW100015303	3000	347	1500	59 1/16	38.1	84	871.00
CW100015505	5000	CW100015405	4000	CW100015305	3000	480	1500	59 1/16	38.1	84	871.00
CW100015506	5000	CW100015406	4000	CW100015306	3000	600	1500	59 1/16	38.1	84	871.00
CW100018608	6000	CW100018488	4800	CW100018368	3600	208	1800	70 7/8	44.5	98	953.00
CW100018602	6000	CW100018482	4800	CW100018362	3600	240	1800	70 7/8	44.5	98	953.00
CW100018607	6000	CW100018487	4800	CW100018367	3600	277	1800	70 7/8	44.5	98	953.00
CW100018603	6000	CW100018483	4800	CW100018363	3600	347	1800	70 7/8	44.5	98	953.00
CW100018605	6000	CW100018485	4800	CW100018365	3600	480	1800	70 7/8	44.5	98	953.00
CW100018606	6000	CW100018486	4800	CW100018366	3600	600	1800	70 7/8	44.5	98	953.00

Add W for white or SW for silica white (or consult the optional colour chart and contact your *STELPRO representative for all other colours)

Add FF for front air outlet (available only in 600 W and 800 W densities per linear foot)

--- not available

TECHNICAL DRAWINGS

