


ROMEX® SIMpull® NMD90

Copper Conductors, 300V / -40°C MIN, 90°C MAX, PVC / Nylon Insulation, PVC Jacket

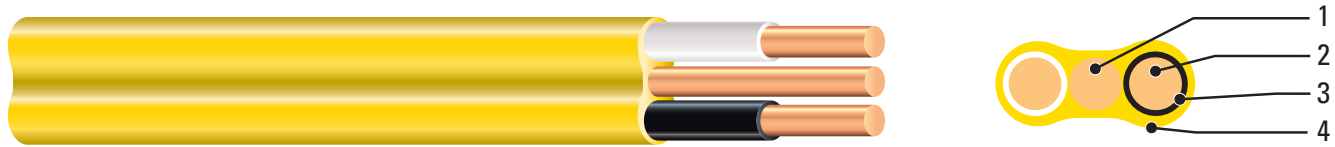

CONSTRUCTION:

Southwire's Romex® SIMpull® NMD90 cables are available as two- or three-conductor cables with a bare grounding conductor. It is manufactured using annealed (soft) copper conductors—compressed standing for stranded conductors; a heat-resistant thermoplastic polyvinyl chloride (PVC) insulation and nylon jacket for the individual conductors with a PVC jacket for the overall construction.

1. Ground Conductor
2. Copper Conductor
3. PVC / Nylon Insulation
4. PVC Jacket

CONDUCTOR COLOURS:

Conductors are white, black and red (for 3 conductor cables). Cable jackets are colour coded by size for quick identification:

Number of Conductors	Size (AWG)				
	14	12	10	8	6
2	● ● ○	● ●	● ●	● ○	○
3	○	●	●	○	○

Romex® SIMpull® NMD90 conductors feature SIM Technology jackets which reduces the coefficient of friction, allowing cables to be installed without external lubricants, resulting in reduced labour and materials costs.

APPLICATIONS & FEATURES:

Southwire's Romex® SIMpull® NMD90 cables may be used for both exposed work in dry locations or concealed work in dry or damp locations. The maximum allowable conductor temperature is 90°C. The minimum recommended installation temperature is -25°C for two-conductor cables and -10°C for three-conductor cables (with suitable handling procedures). Material should be properly stored above 0°C for 24 hours prior to installation. The maximum voltage rating for all intended applications is 300 volts. Consult the Canadian Electrical Code¹ for further information related to applications.

SPECIFICATIONS:

Romex® SIMpull® NMD90 cables meet or exceed the following requirements:

- ASTM B3
- CSA C22.2 No. 48 (non-metallic sheathed cable)
- Canadian Electrical Code Part I



Southwire Canada Company | 5705 Cancross Court Suite 100 | Mississauga, ON L5R 3E9 | www.southwire.ca

Copyright © 2017 Southwire Company, LLC. All Rights Reserved.



SPS_192_ELECTRICAL-E(17-07) Rev 5.00

SPECIFICATIONS

Conductor			Insulation Thickness		Ground Wire		Approx. Jacket Thickness		Approx. Cable Dimensions		Approx. Net Weight		Allowable Ampacity (Amps) 30°C Ambient †
Size AWG	# of Conductors	# of Strands	inches	mm	Size AWG	# of Strands	inches	mm	inches	mm	lb /1000ft	kg /km	
14	2	1	0.034	0.86	14	1	0.030	0.76	0.388 x 0.192	9.86 x 4.88	68	101	25*
12	2	1	0.034	0.86	14	1	0.030	0.76	0.422 x 0.209	10.71 x 5.30	86	129	30*
10	2	1	0.034	0.86	12	1	0.030	0.76	0.481 x 0.230	12.21 x 5.84	122	182	40*
8	2	7	0.040	1.02	10	1	0.045	1.14	0.636 x 0.312	16.15 x 7.92	208	310	55
6	2	7	0.051	1.30	8	7	0.045	1.14	0.792 x 0.370	20.12 x 9.40	315	468	75
14	3	1	0.034	0.86	14	1	0.030	0.76	0.345	8.77	86	128	25*
12	3	1	0.034	0.86	14	1	0.030	0.76	0.381	9.69	114	169	30*
10	3	1	0.034	0.86	12	1	0.030	0.76	0.427	10.85	163	242	40*
8	3	7	0.040	1.02	10	1	0.045	1.14	0.570	14.47	275	408	55
6	3	7	0.051	1.30	8	7	0.045	1.14	0.695	17.65	421	627	75
3	3	7	0.051	1.30	6	7	0.080	2.03	0.925	23.48	799	1189	115

1 2015 Canadian Electrical Code Part I

† Allowable ampacities are for general use as specified by the Canadian Electrical Code, 2015, Table 2.

* In accordance with the 2015 Canadian Electrical Code Part I Rule 14-104(2)